

GLOBE Airmotors | Boerhaaveweg 9-11 | NL - 2408 AD Alphen a/d Rijn | Tel +31 172 426 608 | info@globe-benelux.nl

Specifications: VA8J&X-NL | VS8C-NL | VA8C-NL


Vane Air Motor Non Lubricated



ontents	
erformance	3
Nain dimensions VA8J&X-NL	3
Nain dimensions VS8C-NL	4
Nain dimensions VA8C-NL	4
ccessories for the V8-NL	5



Ordering Code

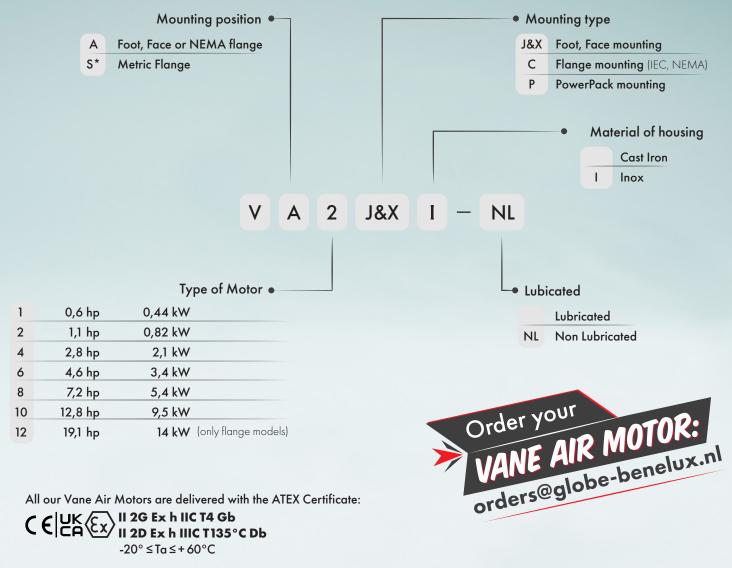


^{*} The VS types are only available with mouting type C (for example VS8C).

Performances V8 Vane Air Motor


TORQUE -- SPEED 16 14 105psi/7bar 12 Torque [lbs ft] 90psi / 6bar Torque [Nm] 75psi / 5bar 10 60psi / 4bar 45psi / 3bar 30psi / 2bar 500 1000 1500 2000 2500


Speed [rpm]

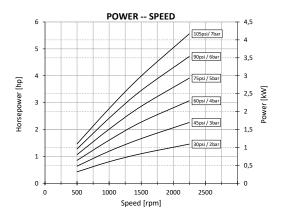

Air quality and filtration:

Use 5 micron filtration. The air has to be dry to prevent corrosion inside the motor when it is not in use. Advisable is to use an air dryer with set point of 20 degrees Celsius below lowest ambient temperature.

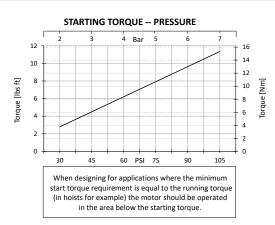

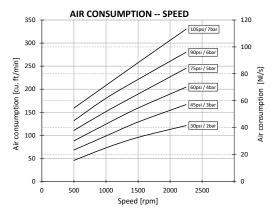



- » Silencer supplied with motor.
- » Motor is reversible.
- » Maximum temperature for ATEX applications -20°C to +60°C (-4°F to +140°F)
- » Maximum temperature for non-ATEX applications -20° C to $+80^{\circ}$ C (-4° F to $+176^{\circ}$ F)

Maximum speed 2250 rpm | Contineous speed 1500 rpm

Life time depends highly on operational speed and air pressure. Continuous duty is best suited to non lubricated operation. Moisture in the air can cause corrosion problems during rest periods.

VA8J&X









- » Silencer supplied with motor
- » Max. Overhung Force on shaft 620 N (140 lbf.)
- » Axial loads should be kept to a minimum
- » Mass 11.1 kg


780-911 Rotor

802-032 Screw 802-001 Screw

Screw











Note: With air inlet at port 'A', rotation is clockwise looking on shaft. For opposite rotation reverse ports.

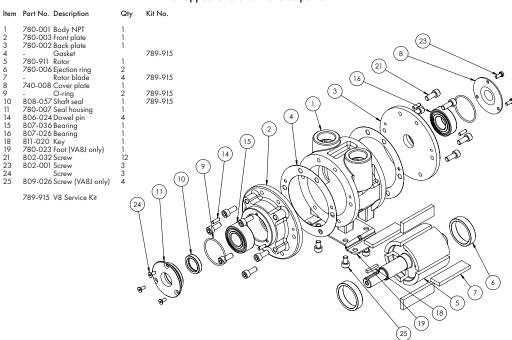



VS8C


Note: With air inlet at port 'A', rotation is clockwise looking on shaft.

For opposite rotation, reverse ports.

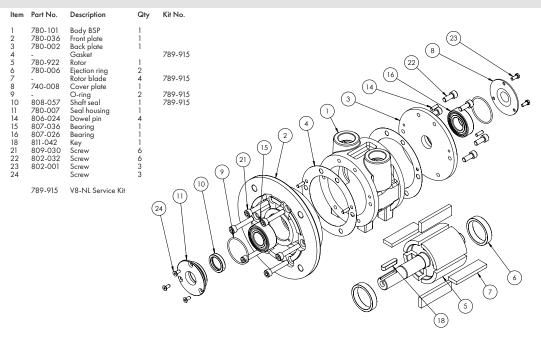










- » Maximum temperature -20°C to +60°C (-4°F to +140°F)
- » Silencer supplied with motor
- » Max. Overhung Force on shaft 620 N (140 lbf.)
- » Axial loads should be kept to a minimum
- » Mass 11.1 kg

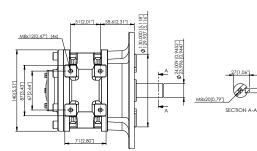



VA8C

Note: With air inlet at port 'A', rotation is clockwise looking on shaft. For opposite rotation, reverse ports.

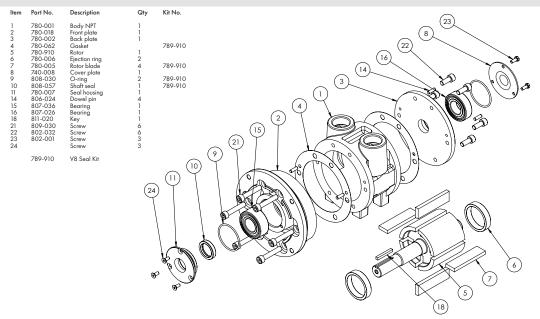









- » Maximum temperature -20°C to +60°C (-4°F to +140°F)
- » Silencer supplied with motor
- » Max. Overhung Force on shaft 620 N (140 lbf.)
- » Axial loads should be kept to a minimum
- » Mass 11.8 kg





Accessories for the GLOBE Air Motor

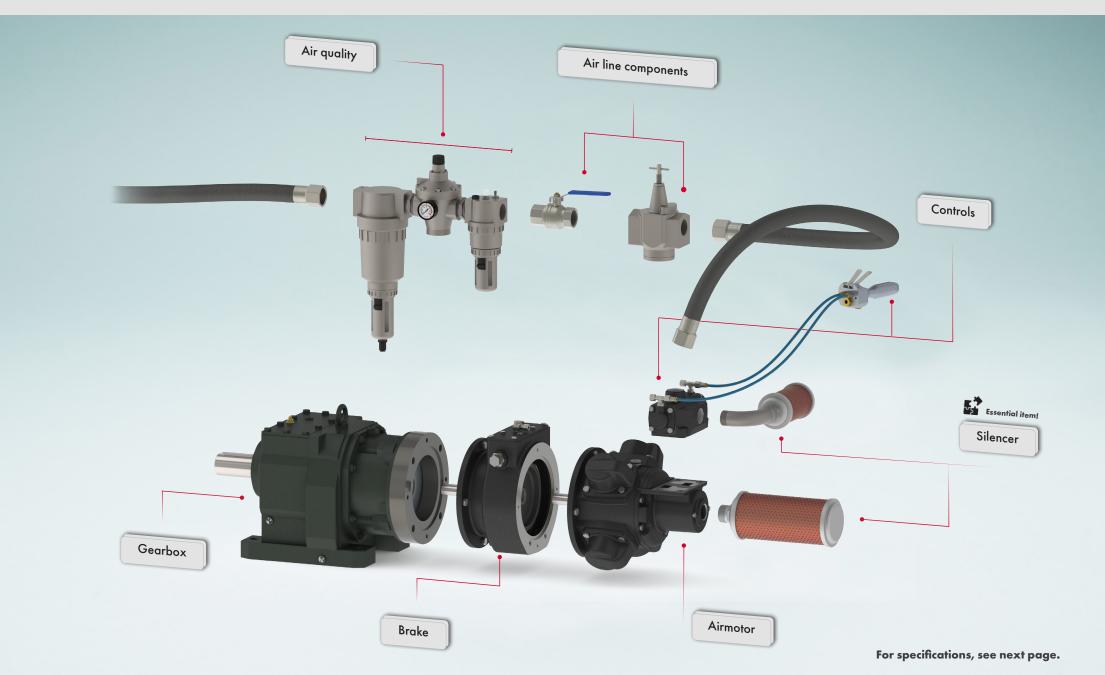

Accessories for the GLOBE V8 Vane Air Motor

Complete your V8-NL Vane Air Motor with many different accessories. Order your GLOBE air motor with the desired options, and have it delivered to you completely assembled. In addition, you are assured of GLOBE quality for your air motor and assembly.



For VA8C-NL VA8J-NL VA8X-NL VS8C-NL

Many of our accessories, including the brakes, are ATEX certified. With the GLOBE air motors & accessories you can always work safely in explosion-prone areas. See below which options we offer for your air motor.

Controls

We offer many different control valves for our air motors. For example we supply proportional control valves which are mounted directly onto the air motor. They allow you to not only change the direction of the motor, but also the speed of the motor. Besides the proportional control valves we also offer standard control valves suitable for our air motors.

> The following control valves are available for the GLOBE V8-NL Vane Air Motor:

Hand Controlled

Remote Controlled

ART. NR 323-900 ART. NR 321-900

ART. NR

A414BN90





Gearbox

The GLOBE vane air motors are available with worm, coaxial and planetary gearboxes. The gearboxes are mounted directly onto the vane motors. This design makes them compact and well protected from external influences. The gearboxes are compatible with all our vane airmotors, available in stainless steel and with ATEX-Certification.

> The following gearboxes are available for the GLOBE V8-NL Vane Air Motor:

Worm

Planetary

Coaxial

Brakes

The combination of motor with brake is widely used for winches, cranes and positioning devices. The ATEX approved brakes within the GLOBE program have a very compact built and are very robust. All brakes are built from cast iron or steel housings and are easy to install on our air motors and gearboxes.

BN90

14 Nm / 13,3 lbs ft. Holding Torque

3,4 bar / 50 PSI Release pressure

Flange type 71 B5 IEC. NEMA Mounting options





Air quality & Air line components

FRL systems combine a shut off valve, filter, regulator and a lubricator in a ready to use set. It provides you with clean air and an efficient system that will extend the service life of air-powered tools and equipment. By using a speed control valve, you can set your air motor to a desired RPM without reducing its torque. It allows large airflows to pass while minimizing pressure loss at the same time.

1" FRL Unit		Speed regulator	
Port size	1 inch	Port size	1 inch
Max. operating pressure	10 bar / 145 PSI	Port thread	NPT / BSP
Housing material	Aluminium		
Weight	1.41 KG / 3.11 lb		



1" Silencer

An air motor may produce noise that can be harmful to surrounding workers and/ or cause noise problems in the application. The GLOBE Pneumatic air silencers are a simple and cost-effective solution to reduce noise levels and unwanted discharge of contaminants.

A GLOBE Silencer is required for optimal reach of maximum power. Choosing a GLOBE Silencer over other brands can prevent loss of power or motor malfunctions. The GLOBE silencers are designed specifically for our motors.

> ART. NR A31820006

Service Kits

Regular maintenance is imporant to ensure a long service life of your vane air motor. Our service kits are specifically designed for your vane air motor. One servicekit contains everything you need for a service maintenance. We recommend to always have at least one service kit available in case of unexpected





